

# DATASHEET

## Thermal Protector STM

### Type series PTC thermistors



Thermik\* thermistors are used for temperature monitoring. They are optimally designed for direct installation in the windings of electric motors and transformers. Likewise, Thermik thermistors, in their respective housings, prevent overheating of devices (electronic assemblies, heat sinks, etc.). Please ask for more information.

Thermik is one of the few suppliers who can draw on their own experience in the manufacture of PTC ceramics. Indeed, because the underlying technology is of fundamental importance in the process, our thermistors are qualitatively different from conventional products even in this respect.

#### **Customised designs**

Design K - customised – variations/additions possible upon request:


- Colour coding
- Cable insulation material or cable cross-section
- Cable-end assembly
- Connection technology
- Components used with UL-cable
- Dielectric strength of the insulation (e.g. suitable for installation in Class II applications)

#### **Advantages**

- Small dimensions + mechanical stability
- Fast response
- Temperature-resistance characteristics tailored to the application in question

### Colour-coding dependent on temperature according to DIN 44081 / DIN 44082

60	70	80	90	100	105	110
white	white	white	green	red	blue	brown
grey	brown	white	green	red	grey	brown
115	120	125	130	135	140	145
blue	grey	red	blue	red	white	white
green	grey	green	blue	brown	blue	black
150	155	160	165	170	180	190
black	blue	blue	blue	white	white	black
black	black	black	brown	green	red	brown

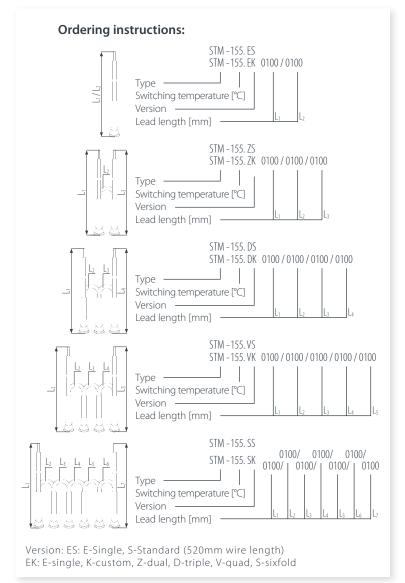




#### Installation and functions

Where possible, the PTCs are to be inserted parallel to the coil. As a result, when shaping the coil ends, the mechanical stress of the PTCs is minimised. In so doing, the Mylar®-Nomex® shrink cap is highly suited to this purpose due to its mechanical stability (no cold flow in contrast to Teflon®). In connection with the miniature pill (Ø 1.5 mm) response times of 5 to 10 seconds (max.) are achieved depending on the version.

Thermik thermistors correspond to DIN 44081 and/or 44082, IEC60034-11:2004 and are characterised by high resistance to temperatures. Resistance increases greatly in the range of the rated response temperature. Via a trigger device, this change can be used to shut down the load current circuit. Electronic evaluations in are also possible in different applications.

### Temperature resistance diagram and main parameters in accordance with DIN 44081/44082 and IEC60034-11:2004



#### **General characteristics**


Temperature resistance diagram in accordance with IEC60034-11:2004, DIN 44081 (single), DIN 44082 (triplet). Advantageous values: Rated response temperature  $T_{\text{REF}}$  60 °C to 190 °C\*, in each case in increments of 10 K.

Temperature range	Resistance	Measured voltage [V <sub>DC</sub> ]				
-20 °C to T <sub>REF</sub> -20 K	$20\Omega$ to $250\Omega$	≤ 2,5 V				
Temperature range 90 °C - 160 °C						
T <sub>ref</sub> -5 K	≤ 550 Ω	≤ 2,5 V				
T <sub>ref</sub> +5 K	≥ 1.330 Ω	≤ 2,5 V				
T <sub>ree</sub> +15 K	≥ 4.000 Ω	≤ 7,5 V pulsed				

Dielectic strength of the insulation Ueff = 2.500 V

\* These parameters relate to  $T_{\rm REF}$  from 90 °C to 160 °C. Resistance values for  $T_{\rm REF}$  < 90 °C and > 160 °C are available on request.

The listed products are an extract from our standard range. Other versions and customised manufacturing are available upon request.

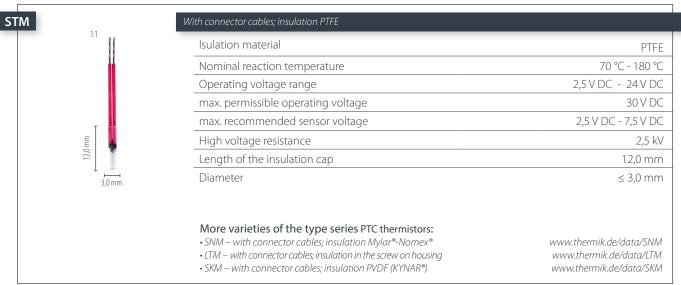



"In accordance with the Premix text - specifications relating to part applications from the buest which develop from our standards are not deviced for that capacity to support an application and and or conformity with standards. The responsibility for testing the suitability of this probability produces for such applications bits upon the user - stight deviations are possible in terms of dimensions/ values, depending on the embodiment of the poduct. We seever the dott for make exhibited manages in the outse of thirdire development. Details concerning catalogue, assessment methods.