




- Same as **UP72** except leadwire **"AWG # 24"**
- Variation of **UP7**, They are More than **10 million** units shipped per annum (2009)
- The **smallest** UL recognized motor protector sealed in PBT enclosure (Stronger than UP6)
- More than **30 years** of long-seller

### Specifications

- Operating Temp 55°C~150°C(5°C step)
- Tolerance ±5°C、±7°C、±10°C
- Differential 30±15K(Standard)
- Breaking Capacity  
4A 125V AC 6000 cycle(resistive)  
2.5A 250V AC 10000 cycle(resistive)

### Dimensions

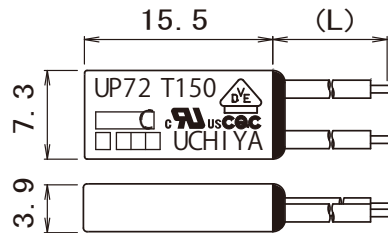

### Applications


- Overheating Protection
- Small motor
- Transformer
- Power Supply
- Lighting Fixture
- Projector

### Safety Approval


※Contact us for approved conditions in detail.

Model	Agency	Standard	Category	Electrical Rating	Max temp	File No.
<b>UP72 T150</b>	UL	UL2111	Motor Protector	125V/250V AC 0.373 kW	150°C	E52703
	c-UL	CSA C22.2 No.77	Motor Protector	125V/250V AC 0.373 kW	150°C	E52703
	CQC	GB14536.10	Thermostat (Non -fused bimetal-type)	4A/125V, 2.5A/250V AC	150°C	CQC04002009091 CQC03002008321
<b>UP72</b>	EN (VDE)	EN IEC 60730-2-22	Thermal Motor Protector	250V AC	150°C	40003837
	EN (VDE)	EN IEC 60730-2-9	Thermal Cut-out	2.5A(1.6A) /250V AC resistive (inductive) 10000 cycles	150°C	40023061

### Graph Left: Tripping Time vs Current (at 25°C)

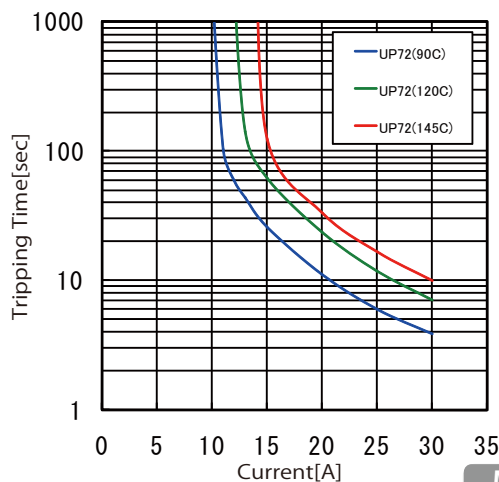

### Graph Right: Operating Temp. Drop due to Current

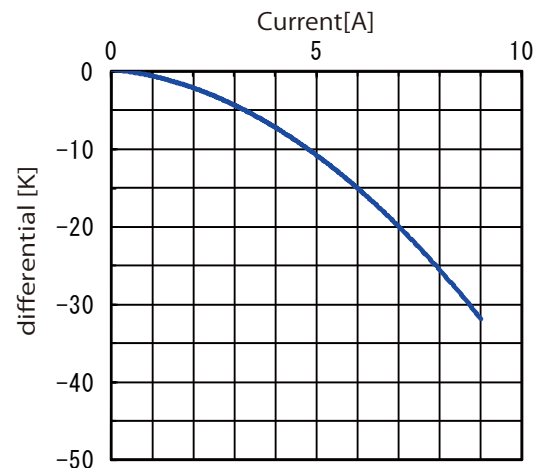

### Mounting method

In case of sensing heat directly from the heat source, place the motor protector to touch its opposite surface of "UCHIYA" printed surface to the heat source.

\*In case of sensing convection heat or heat emission, please contact Uchiya.  
The condition of sensing heat differ case by case.

